



**POLITECNICO**  
MILANO 1863



**POLITECNICO**  
MILANO 1863

# Assessing groundwater contribution to streamflow of a large alpine river

Ravazzani Giovanni

Department of Civil and Environmental Engineering, Milan, Italy

WEBINAR CS<sup>3</sup>

**UNDERGROUND SPACE**  
FROM RESOURCES TO STRUCTURES AND INFRASTRUCTURES



**MARCH 8TH, 2022**




**9.00 - 13.00 (CET)**



**AUDITORIUM**

Milano Città Studi - Via G. Pascoli, 53  
and Online on Webex

# Motivation

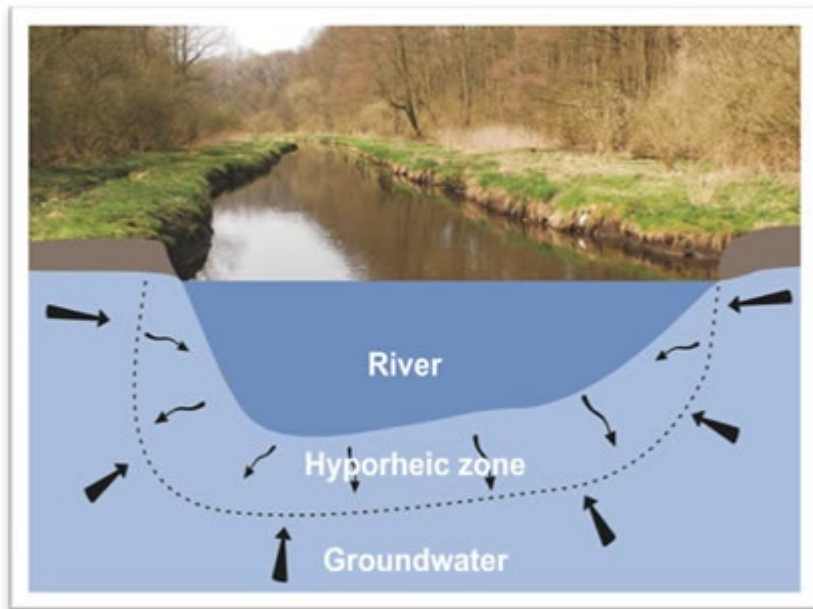

An illustration of the hyporheic zone  
(© Joerg Lewandowski, IGB)

The transition zone between surface water in streams and groundwater has a key role for:

- maintaining the ecological functions of running waters
- understanding hydrodynamic processes (exfiltration or gaining condition and infiltration or losing condition)
- Predicting water quality issues caused by polluted water transported between groundwater and surface water

# Objectives

- Investigating river-groundwater interaction of a large Alpine river, in Italy, through a field campaign
- Implementing a distributed hydrological model that includes groundwater flow and interaction with river
- Predicting infiltration and exfiltration conditions for different flow regimes



Ravazzani, G., Curti, D., Gattinoni, P., Della Valentina, S., Fiorucci, A., Rosso, R., 2015. Assessing groundwater contribution to streamflow of a large Alpine river with heat-tracer methods and hydrological modeling. *River Research and Applications*, accepted, available online

# The Toce Alpine river basin


Total area: 1800 km<sup>2</sup>

Area at Candoglia: 1500 km<sup>2</sup>

Area at Prata: 1100 km<sup>2</sup>

Discharge gauging station in Candoglia




Field campaign for groundwater-river flux assessment in Prata

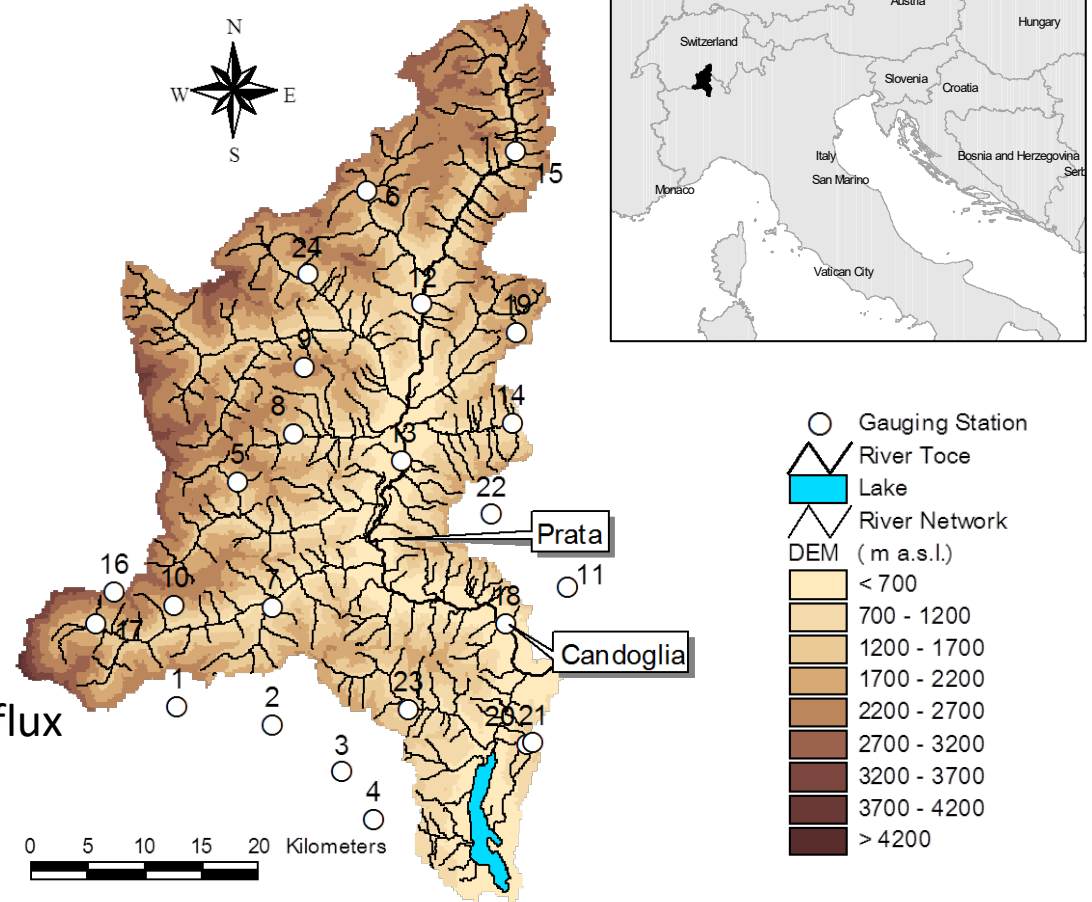

# The flow duration curve

FEST-WB: *Flash – flood Event – based Spatially – distributed rainfall – runoff Transformation – including Water Balance*


[www.fest.polimi.it](http://www.fest.polimi.it)

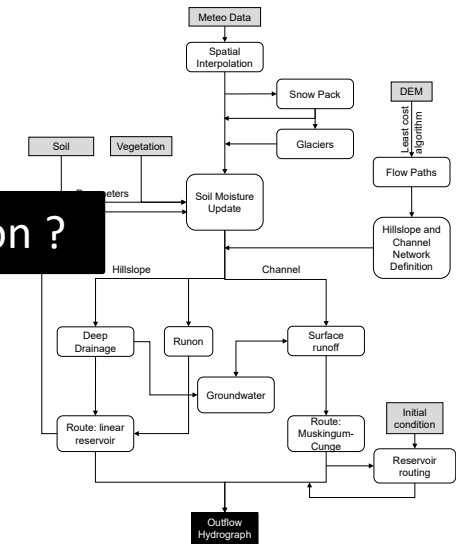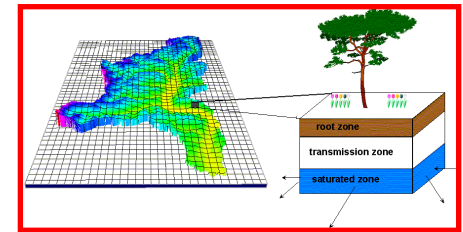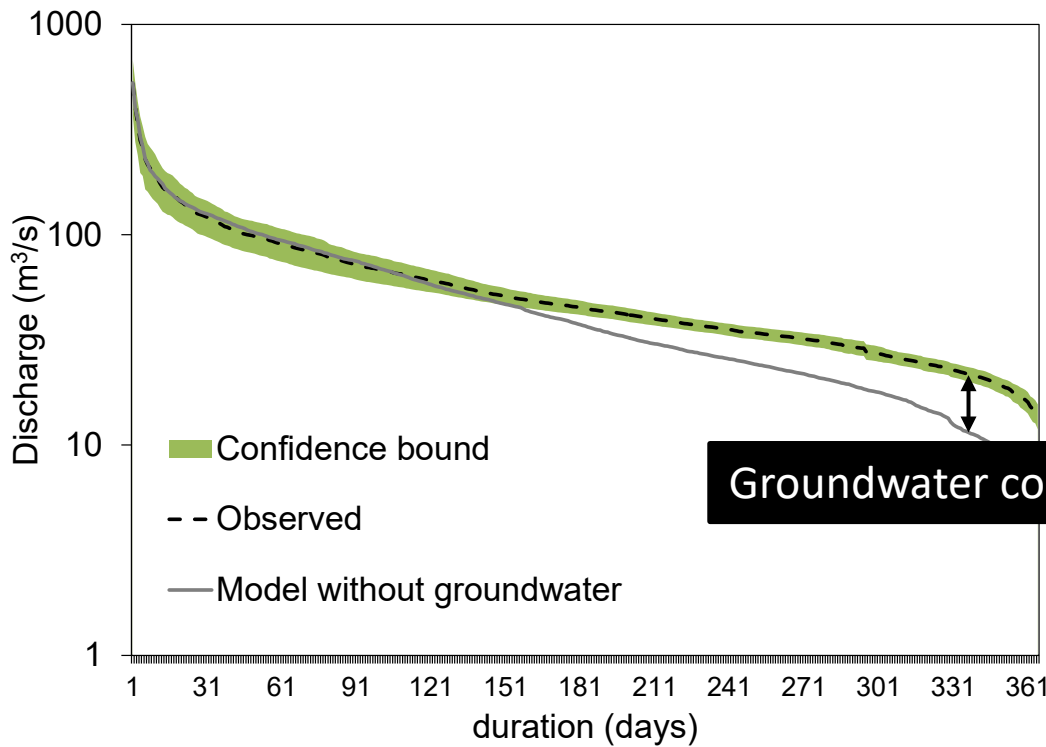

# Heat-tracer methods

## Transient heat transport solution

### Damping and phase attenuation of temperature with depth

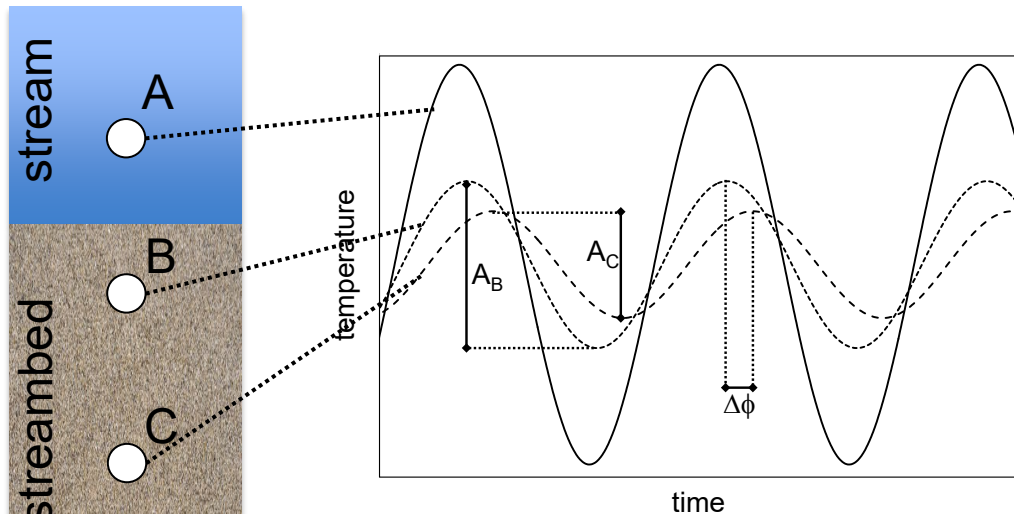

$\lambda_e$  thermal conductivity of saturated sediment [MLT<sup>-3</sup>K<sup>-1</sup>]  
 $\rho$  density of the saturated sediment [ML<sup>-3</sup>]  
 $c$  specific heat capacity of the saturated sediment [ML<sup>2</sup>T<sup>-2</sup>K<sup>-1</sup>]  
 $z$  vertical distance [L]  
 $q_z$  specific flow [LT<sup>-1</sup>],  
 $\rho_w$  density of water [ML<sup>-3</sup>]  
 $c_w$  specific heat capacity of the water [ML<sup>2</sup>T<sup>-2</sup>K<sup>-1</sup>]

Keery et al. (2007)

$$\left(\frac{H^3 D}{4z}\right)q_z^3 - \left(\frac{5H^2 D^2}{4z^2}\right)q_z^2 + \left(\frac{2HD^3}{z^3}\right)q_z + \left(\frac{\pi c \rho}{\lambda_e \tau}\right)^2 - \frac{D^4}{z^4} = 0$$

$$D = \ln\left(\frac{A_{z,t+\Delta t}}{A_{0,t}}\right)$$

$$H = \frac{c_w \rho_w}{\lambda_e}$$

$A_{z,t+\Delta t}$  temperature amplitude at depth  $z$  and time  $t + \Delta t$


$A_{0,t}$  temperature amplitude at the river bed surface at time  $t$

$\Delta t$  time lag between temperature amplitudes

# Heat-tracer methods

## Steady-state heat transport solutions

### Temperature profile along a vertical


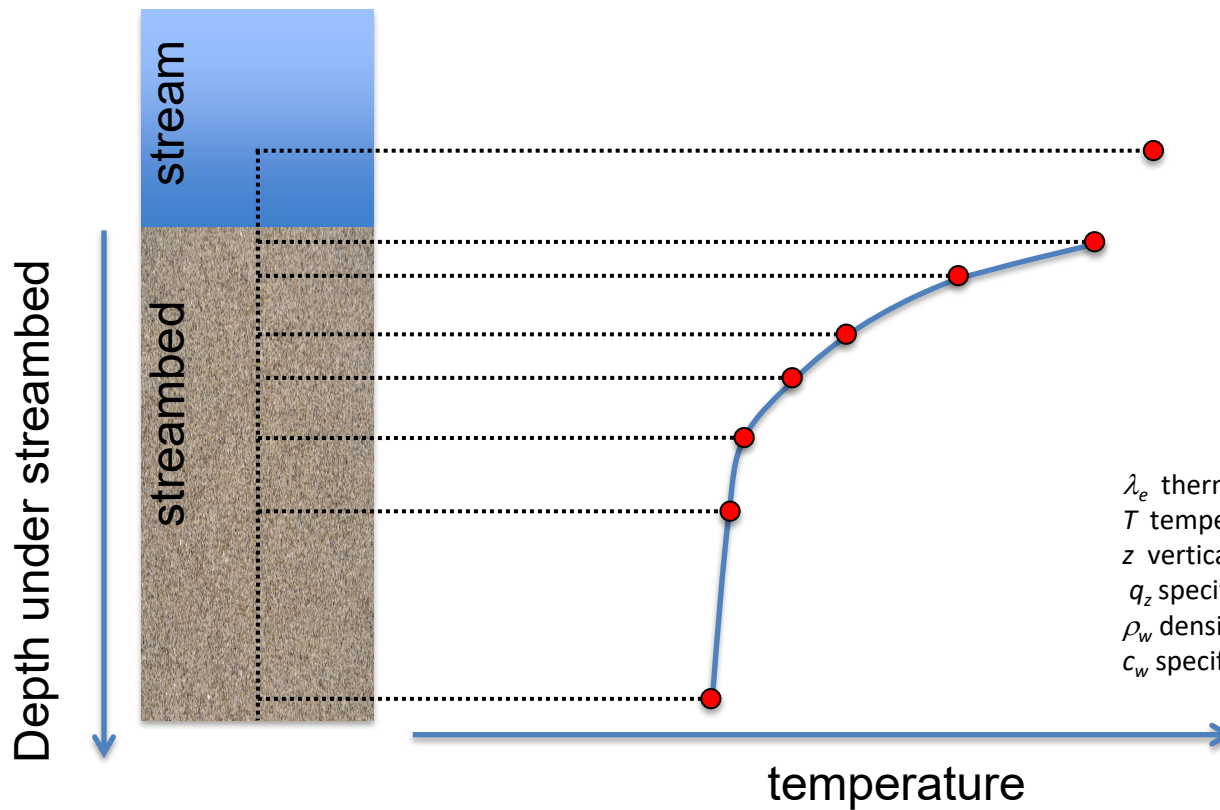


Bredehoeft and Papadopoulos (1965)  
Schmidt et al., (2006)

$$\frac{T(z) - T_0}{T_L - T_0} = \frac{\exp\left(\frac{q_z \rho_w c_w}{\lambda_e} z\right) - 1}{\exp\left(\frac{q_z \rho_w c_w}{\lambda_e} L\right) - 1}$$


$\lambda_e$  thermal conductivity of saturated sediment [MLT<sup>-3</sup>K<sup>-1</sup>]  
 $T$  temperature [K]  
 $z$  vertical distance [L]  
 $q_z$  specific flow [LT<sup>-1</sup>],  
 $\rho_w$  density of water [ML<sup>-3</sup>]  
 $c_w$  specific heat capacity of the water [ML<sup>2</sup>T<sup>-2</sup>K<sup>-1</sup>]

# Thermal properties assessment dual-probe heat-pulse sensor




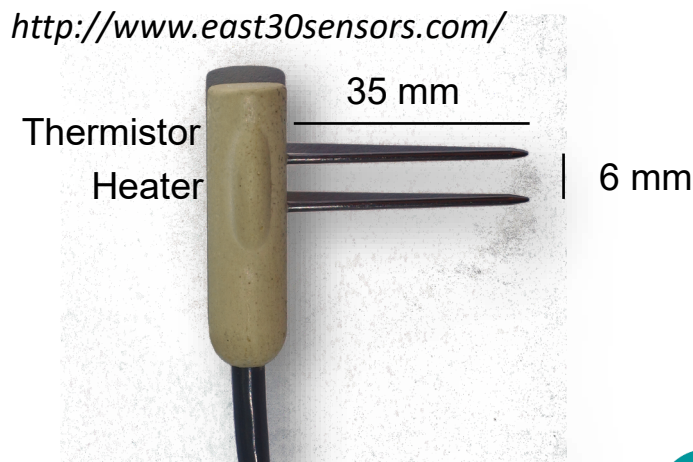
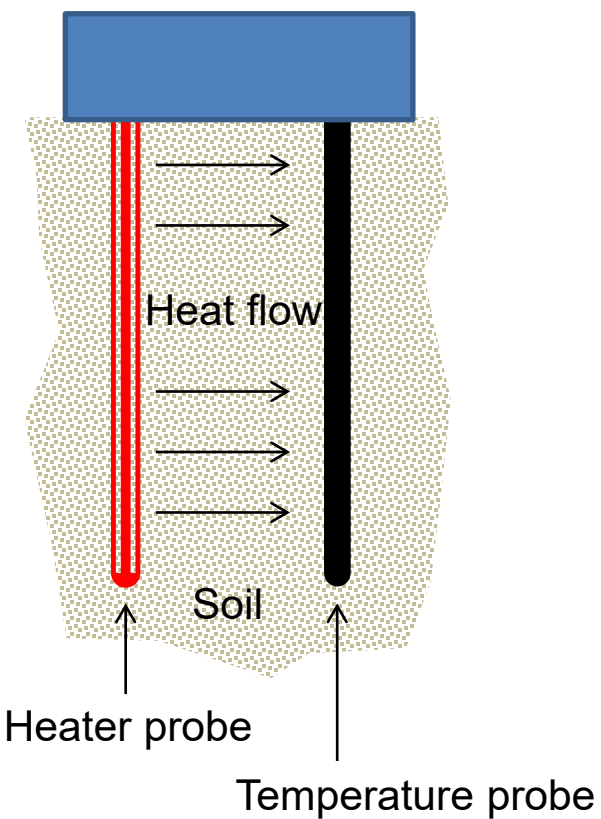




# Field campaign

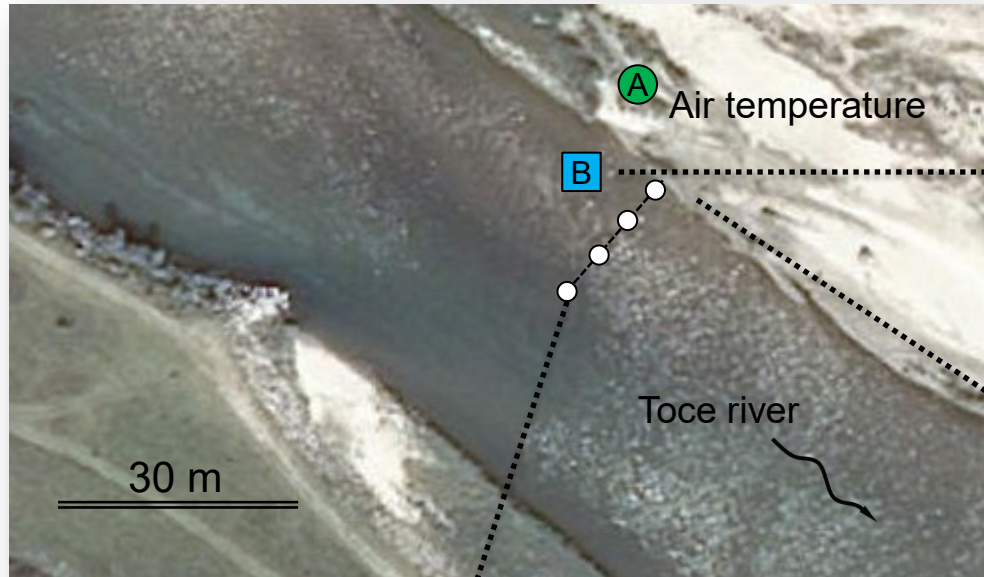

September 2013

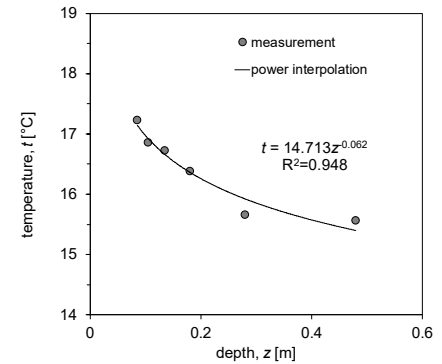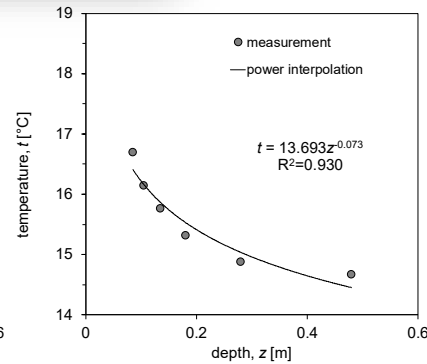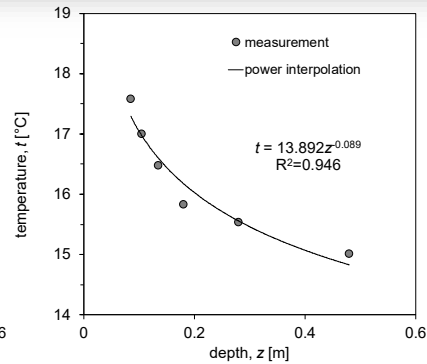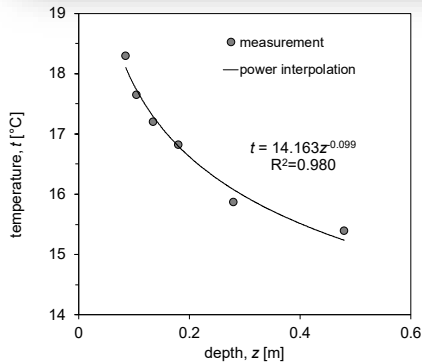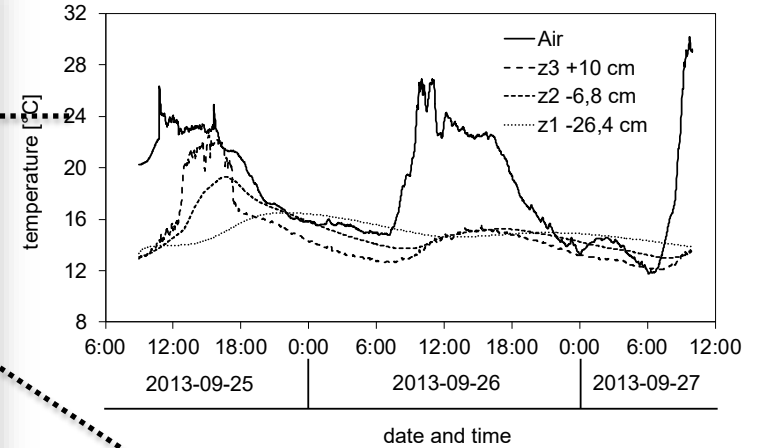

# Field campaign



Transient heat transport solution

$$q_z [m/d] = -0.31$$




$$Q [m^3/s] = 7.17$$

Steady-state heat transport solutions

$$q_z [m/d] = -0.33$$


$$Q [m^3/s] = 7.64$$

# The flow duration curve with groundwater interaction

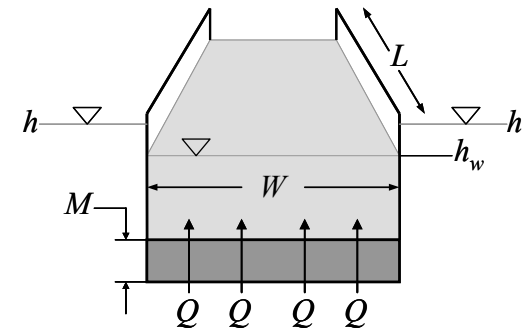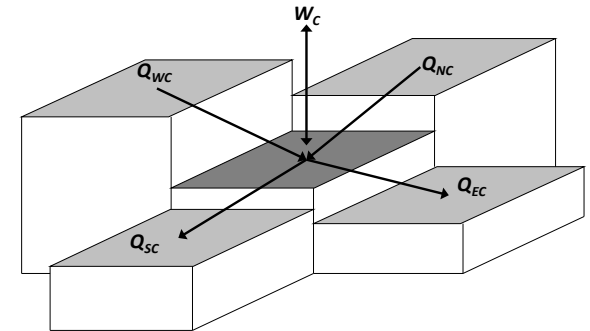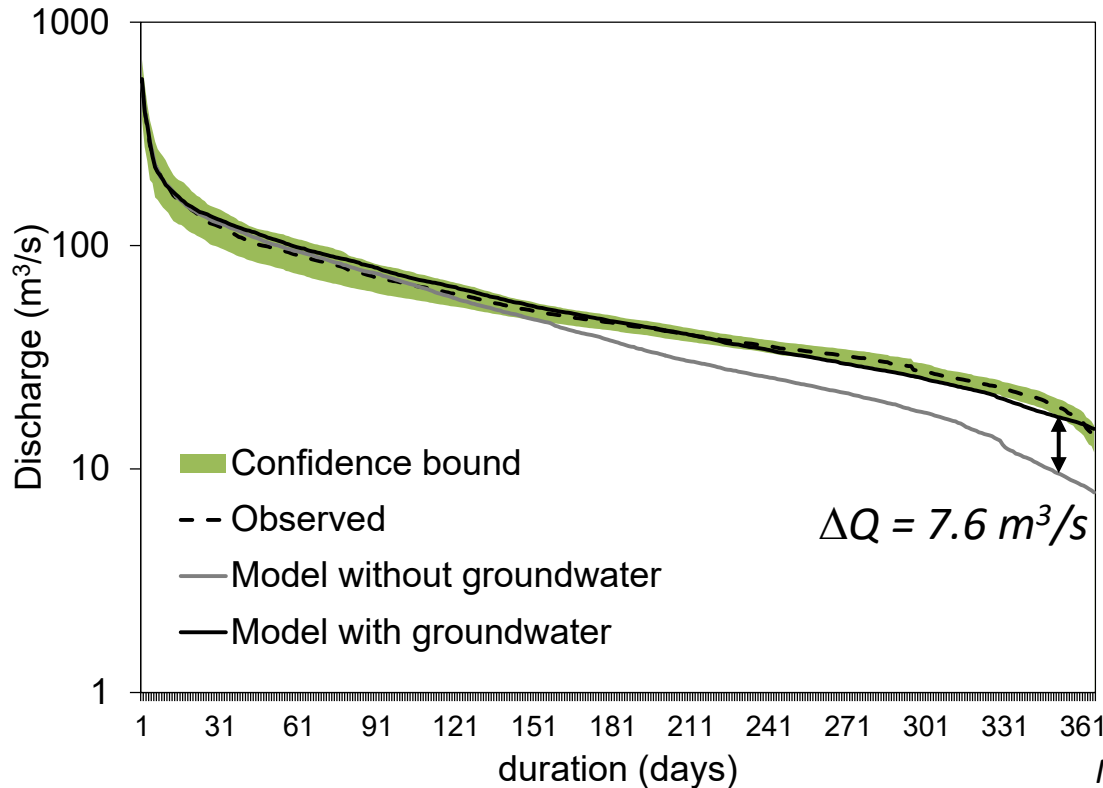

MACCA-GW, Ravazzani et al. / Environmental Modelling & Software 26 (2011) 634e643

# Modelled infiltration and exfiltration condition

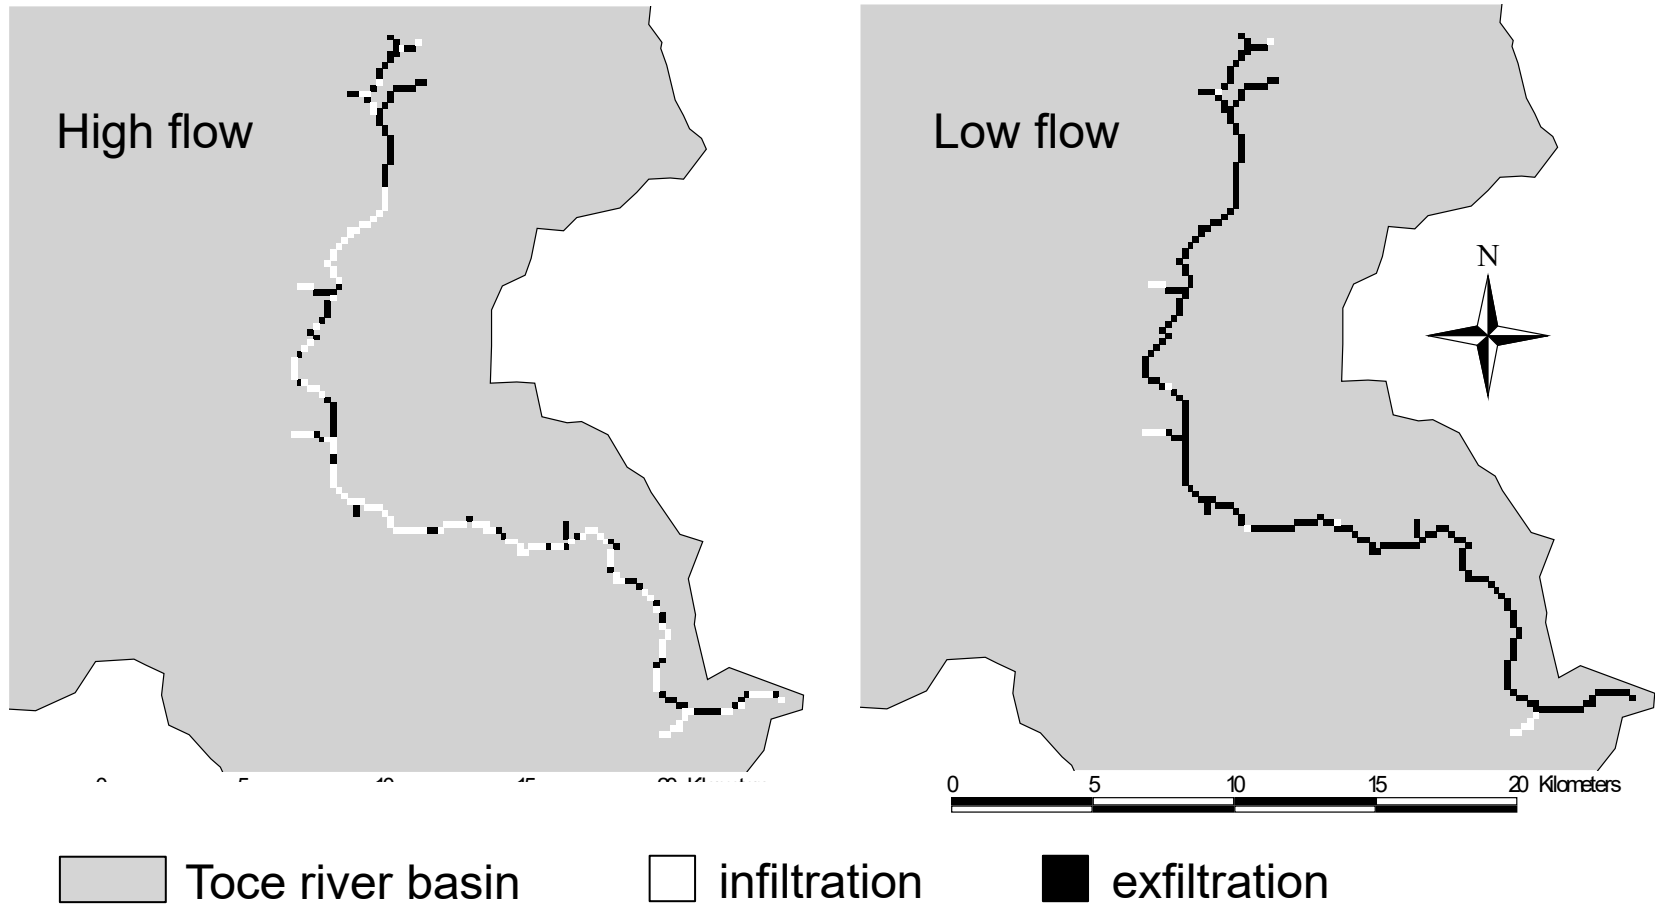

# Conclusions

- Through a field campaign we assessed that groundwater contribution to Toce streamflow is significant when river discharge is low
- A groundwater model that interacts with river flow was implemented and, as a result, underestimation of river discharge for low flow regime was eliminated.
- Modelled groundwater contribution to streamflow is in agreement with the field campaign results
- the distributed hydrological model allows to predict infiltration and exfiltration conditions even for high discharge when a field campaign would not be possible

# THANK YOU FOR YOUR ATTENTION

[giovanni.ravazzani@polimi.it](mailto:giovanni.ravazzani@polimi.it)

This work was carried out under the umbrella of the Characterization of Lake Maggiore and Toce River project, funded by **ENI Syndial SpA**. The authors are grateful to **ARPA Piemonte** for providing meteorological and hydrological observations.



[www.arpa.piemonte.it](http://www.arpa.piemonte.it)



syndial

[www.eni.com](http://www.eni.com)